



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



Material Handling Hose



ENGINEERING YOUR SUCCESS.



Sandblast



LIBECCIO EN ISO 3861

Recommended for pneumatic conveying of dry sand and cement, gravel, metal and other dry abrasive materials.

Cement



CEMENT SM 10

Suitable for delivery and suction of dry cement



CEMENT 713 10

Suitable for delivery of dry cement.

Mortar



INTONACATRICI 12 - 25 - 40

Designed for delivery of sand, gravel (12), mortar and wet cement (25 and 40) from plaster machines or spray nozzles.

Concrete



BETON 80

Suitable for placement of concrete at casting locations by concrete pumps at the ends of the machine arms.

General Purpose



MULTIREX PU/ANC

Suitable for suction and delivery of abrasive materials.



MEDIREX PU

Resistance to internal abrasion for suction and delivery.



FORTIREX PU/ANC


Excellent abrasion resistance to internal abrasion for suction and delivery.



APERSPIR PU

Suitable for food and for medium abrasive materials.

Special Heavy Duty



CERGOM

Suitable for pneumatic suction and delivery of dry cement, coal, CDR (fuel by-waste material), minerals, ceramic powder, glass recovery, fibreglass, and to load tankers and storage bins or silos.



H – Material Handling Hose

Sandblast

LIBECCIO EN ISO 3861 ▶ H4

Cement

CEMENT SM 10 ▶ H5

CEMENT 713 10 ▶ H6

Mortar

INTONACATRICI 12 ▶ H7

INTONACATRICI 25 - 40 ▶ H8

Concrete

BETON 80 ▶ H9

General Purpose

MULTIREX PU/ANC ▶ H10

MEDIREX PU ▶ H11

FORTIREX PU/ANC ▶ H12

APERSPIR PU ▶ H13

Special Heavy Duty

CERGOM ▶ H14

A



B



C



D



E



F



G



H



I



J



K



L



M



N



O




LIBECCIO EN ISO 3861

Exceeds the requirements of EN ISO 3861

Hose Construction

- Tube:** Smooth, black, antistatic, abrasion resistant BR/NR rubber compound, abrasion ISO 4649: max 60 - 70 mm³
- Reinforcement:** Synthetic textile fabrics
- Cover:** Black, smooth, antistatic, weather and abrasion resistant SBR/NBR compound. The cover is pinpricked to prevent blistering and bubbling, max. resistance on finished hose: 2,0 MΩ/m

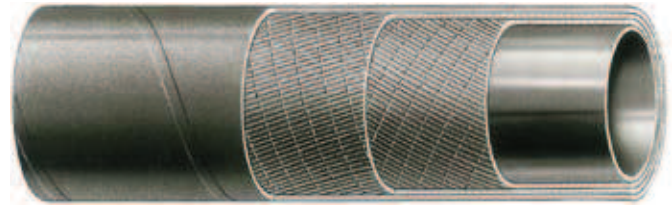

Tolerances

- On inside diameter:**
According to UNI EN ISO 1307/97
- On outside diameter:**
RMA steel mandrel: ± 1,59 mm
- Length tolerance:** ± 1 %

Applications

Suitable for conveying of wet and dry sand and grit blasting materials.

Temperature Range

-30 °C (-22 °F) to +70 °C (+158 °F)

Note

Available on request:
LIBECCIO EN ISO 3861/E with built-in copper wires to provide electrical continuity between both ends.

Safety note

This hose is manufactured to carry a working pressure of 10 bar, but the EN ISO 3861 prescribes a max. W.P. of 6.3 bar.


IHXXXXXXXXXX Part Number / Standard Length m	 I.D. mm	 O.D. mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
LIBECCIO EN ISO 3861										
IH36820200/40	25	40	1,0	150,0	10	4,0	600,0	40	0,92	250
IH36820201/40	30	45	1,0	150,0	10	4,0	600,0	40	1,05	300
IH36820202/40	32	48	1,0	150,0	10	4,0	600,0	40	1,37	320
IH36820205/40	35	54	1,0	150,0	10	4,0	600,0	40	1,56	350
IH36820204/40	40	60	1,0	150,0	10	4,0	600,0	40	1,85	400
IH36820206/40	50	72	1,0	150,0	10	4,0	600,0	40	2,54	500
IH36820207/40	60	82	1,0	150,0	10	4,0	600,0	40	2,95	600
IH36820209/20	80	105	1,0	150,0	10	4,0	600,0	40	4,32	800
IH36820210/20	90	115	1,0	150,0	10	4,0	600,0	40	4,84	900
IH36820211/20	100	125	1,0	150,0	10	4,0	600,0	40	5,30	1000
LIBECCIO L EN ISO 3861										
IH36820300/40	19	33	1,0	150,0	10	4,0	600,0	40	0,69	190
IH36820301/40	25	39	1,0	150,0	10	4,0	600,0	40	0,84	250
IH36820303/40	38	55	1,0	150,0	10	4,0	600,0	40	1,46	380
IH36820305/40	42	60	1,0	150,0	10	4,0	600,0	40	1,70	420
IH36820306/40	50	70	1,0	150,0	10	4,0	600,0	40	2,28	500
IH36820307/40	60	80	1,0	150,0	10	4,0	600,0	40	2,66	600

RUBBER HOSE LIBECCIO EN ISO 3861 ID mm - WP 1,0 MPa - BP 40 MPa ABRASION 60/70 mm³ MADE IN ITALY Parker ITR

CEMENT SM 10

Hose Construction

- Tube:** Black, antistatic smooth BR/NR rubber compound, abrasion resistant (60 - 70 mm³)
- Reinforcement:** Synthetic textile fabrics, embedded steel wire helix
- Cover:** Black, abrasion and weather-resistant, SBR rubber compound

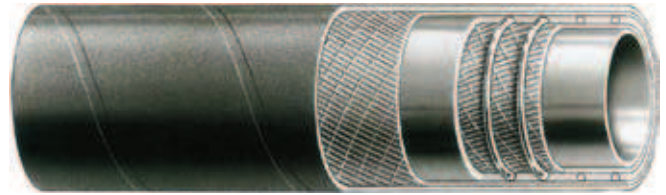

Applications

Suitable for suction and delivery of dry cement to road tankers and storage bins or silos.

Temperature Range







-30 °C (-22 °F) to +70 °C (+158 °F)

Tolerances

- RMA steel mandrel
- On inside diameter:** ± 1,59 mm
- Length tolerance:** ± 1 %

Note

On request, with built-in copper wires to provide electrical continuity between both ends (CEMENT SM/E).

IHXXXXXXXXXX Part Number/ Standard Length m	 I.D. mm	 O.D. mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
CEMENT SM 10										
IH36923100/40	50	64	0,1	150,0	10	3,0	450,0	30	1,92	300
IH36923101/40	60	74	0,1	150,0	10	3,0	450,0	30	2,26	360
IH36923105/20	75	93	0,1	150,0	10	3,0	450,0	30	3,53	450
IH36923102/20	100	118	0,1	150,0	10	3,0	450,0	30	4,80	600
IH36923104/20	110	128	0,1	150,0	10	3,0	450,0	30	5,21	660
IH36923107/20	125	143	0,1	150,0	10	3,0	450,0	30	5,77	750
CEMENT SM H 10										
IH36923108/20	80	100	0,1	150,0	10	3,0	450,0	30	4,32	480
IH36923106/20	100	120	0,1	150,0	10	3,0	450,0	30	5,24	600
IH36923109/20	120	140	0,1	150,0	10	3,0	450,0	30	6,54	720


RUBBER HOSE CEMENT 10 bar MADE IN ITALY Parker ITR



CEMENT 713 10

Hose Construction

- Tube:** Smooth, black, antistatic, abrasion resistant BR/ NR rubber compound.
Abrasion: max 60-70 mmc
- Reinforcement:** Synthetic textile fabrics and built-in copper wire giving electrical continuity between both ends.
- Cover:** Black, abrasion and weather-resistant, SBR rubber compound.

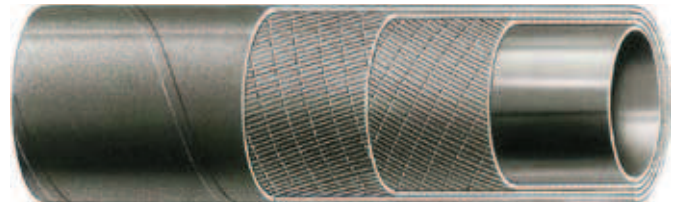

Tolerances

- RMA steel mandrel
- On inside diameter:** $\pm 1,59$ mm
- On outside diameter:** $\pm 1,59$ mm
- Length tolerance:** ± 1 %

Applications

Suitable for delivery of dry cement, grain, seeds and animal feed to road tankers and storage bins or silos.

Temperature Range

-30 °C (-22 °F) to +70 °C (+158 °F)


IHXXXXXXXXXX Part Number/ Standard Length m	 I.D. mm	 O.D. mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH36822223/40	50	68	1,0	145,0	10	3,0	450,0	30	2,04	600
IH36822224/40	60	78	1,0	145,0	10	3,0	450,0	30	2,38	720
IH36822225/40	63,5	81	1,0	145,0	10	3,0	450,0	30	2,49	760
IH36822226/40	75	85	1,0	145,0	10	3,0	450,0	30	1,64	–
IH36822217/40	75	93	1,0	145,0	10	3,0	450,0	30	2,92	900
IH36822222/40	80	98	1,0	145,0	10	3,0	450,0	30	3,10	960
IH36822230/40	90	110	1,0	145,0	10	3,0	450,0	30	3,90	1080
IH36822233/40	100	112	1,0	145,0	10	3,0	450,0	30	2,54	–
IH36822220/40	100	120	1,0	145,0	10	3,0	450,0	30	4,29	1200



INTONACATRICI 12

Hose Construction

Tube:	Black, abrasion resistant, smooth BR/NR rubber compound (60 - 70 mm ³)
Reinforcement:	Synthetic textile fabrics
Cover:	Black, abrasion and weather-resistant, SBR rubber compound

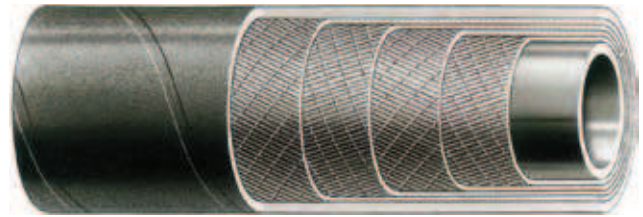

Applications

Designed for delivery of plaster and abrasive materials such as sand, gravel, mortar and wet cement from plastering machines or spray nozzles.

Temperature Range

-30 °C (-22 °F) to +70 °C (+158 °F)

Tolerances

RMA steel mandrel

On inside diameter:

I.D. 19 mm: ± 0,79 mm

> I.D. 19 mm: ± 1,59 mm

On outside diameter:

± 1,59 mm

Length tolerance:

± 1 %

Note

Available on request:

INTONACATRICI /E – with built-in copper wires to provide electrical continuity between both ends.

IHXXXXXXXXXX Part Number/ Standard Length m	 I.D. mm	 O.D. mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH36822055/40	19	33	1,2	174,0	12	4,0	600,0	40	0,70	–
IH36822049/40	50	65	1,2	174,0	12	4,0	600,0	40	1,66	–
IH36822062/40	60	78	1,2	174,0	12	4,0	600,0	40	2,50	–
IH36822052/40	65	85	1,2	174,0	12	4,0	600,0	40	3,03	–


RUBBER HOSE INTONACATRICI 12 bar MADE IN ITALY Parker ITR



INTONACATRICI 25 - 40

Hose Construction

- Tube:** Black, abrasion resistant, antistatic smooth BR/NR rubber compound (60 - 70 mm³)
- Reinforcement:** Synthetic textile fabrics
- Cover:** Black, abrasion and weather-resistant, SBR rubber compound

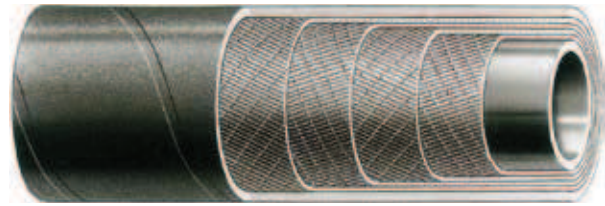

Applications

Designed for delivery of plaster and abrasive materials such as mortar and wet cement from plastering machines or spray nozzles.

Temperature Range

-30 °C (-22 °F) to +70 °C (+158 °F)

Tolerances

RMA steel mandrel

On inside diameter:

≤ I.D. 35 mm: ± 0,79 mm

> I.D. 35 mm: ± 1,59 mm

On outside diameter:

± 1,59 mm

Length tolerance:

± 1 %

IHXXXXXXXX/XX Part Number/ Standard Length m	 I.D. mm	 O.D. mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
INTONACATRICI 25										
IH36822001/40	25	37	2,5	362,5	25	7,5	1087,5	75	0,81	300
IH36822003/40	30	42	2,5	362,5	25	7,5	1087,5	75	0,93	360
IH36822000/40	35	48	2,5	362,5	25	7,5	1087,5	75	1,16	420
IH36822063/40	40	53	2,5	362,5	25	7,5	1087,5	75	1,27	480
IH36822002/40	50	66	2,5	362,5	25	7,5	1087,5	75	1,92	600
INTONACATRICI H 25										
IH36822013/40	65	85	2,5	362,5	25	7,5	1087,5	75	3,03	780
INTONACATRICI 40										
IH36822041/40	32	46	4,0	600,0	40	12,0	1740,0	120	1,14	380
IH36822050/20	65	85	4,0	600,0	40	12,0	1740,0	120	3,04	780
INTONACATRICI L 40										
IH36822030/40	25	38	4,0	600,0	40	12,0	1740,0	120	0,89	300
IH36822044/40	35	49	4,0	600,0	40	12,0	1740,0	120	1,24	420
IH36822031/40	50	66	4,0	600,0	40	12,0	1740,0	120	1,95	600
INTONACATRICI H 40										
IH36822004/40	40	56	4,0	600,0	40	12,0	1740,0	120	1,60	480



BETON 80

Hose Construction

Tube: Smooth, black NR/SBR compound resistant to the abrasive action of the concrete abrasion DIN 53516: max 50±5 mm³

Reinforcement: Steel wire cord plies

Cover: Black, smooth, weather and abrasion resistant NR/SBR rubber compound



Applications

Suitable for placement of concrete at casting locations by concrete pumps at the ends of the machine arms.

Supplied assembled with swaged on full flow hardened couplings at one end or both ends.

Temperature Range

-40 °C (-40 °F) to +70 °C (+158 °F)

Tolerances

On outside diameter:

RMA steel mandrel: ± 1,59 mm

On inside diameter:

According to UNI EN ISO 1307/97

≤ I.D. 65 mm: ± 1,20 mm

I.D. 76 mm: ± 1,40 mm

I.D. 100 - 125 mm: ± 1,60 mm

Length tolerance: ± 1 %

Branding

On the coupling:

BETON 80 bar Parker ITR month/year

IHXXXXXXXXXX Part Number/ Standard Length m	 I.D. mm	 O.D. mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH36827051/0	51	75	8,0	1200,0	80	20,0	3000,0	200	3,96	380
IH36827052/0	65	89	8,0	1200,0	80	20,0	3000,0	200	4,84	400
IH36827053/0	76	100	8,0	1200,0	80	20,0	3000,0	200	5,40	400
IH36827054/0	100	124	8,0	1200,0	80	20,0	3000,0	200	7,04	550
IH36827055/0	125	150	8,0	1200,0	80	20,0	3000,0	200	8,90	700



**MULTIREX PU/ANC****Hose Construction**

Light and flexible hose having a grey rigid PVC spiral embedded in a transparent flexible PVC wall. With external copper wire giving the electrical continuity. Inside PU layer 0,4 mm.

Foods and beverages – the polyurethane used is in conformity with:

- FDA - CFR 21 parts 175,105, 177,1680, 177,2600
- CEE 82/711, 85/572, 89/10, 90/128, 92/30, 93/8, 95/3, 98/11
- German BGA for foodstuff application

**Suction**

≤ I.D. 40 mm:	0,75 bar (563 mm Hg)
I.D. 45 - 152 mm:	0,70 bar (530 mm Hg)

Tolerances

On inside/outside diameter: ± 4 %

Length tolerance: ± 1 %

All other technical data are subject to a: ± 5 % tolerance.

Applications

Suction and pressure hose for: water, fertilisers, food industry, chemical industry, industry for the manufacturing of wood and plastic materials, ventilation, pharmaceutical industry, mechanical engineering.

Temperature Range

-15 °C (+5 °F) to +65 °C (+149 °F)

IHXXXXXXXX/XX Part Number/ Standard Length m	 I.D. mm	 Wall Thickness mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH36608040/30	40	–	0,7	101,5	7	2,1	304,5	21	0,6	242
IH35608045/30	45	–	0,7	101,5	7	2,1	304,5	21	0,6	267
IH35608050/30	50	–	0,7	94,3	6,5	2,0	282,8	19,5	0,8	293
IH35608055/30	55	–	0,7	94,3	6,5	2,0	282,8	19,5	0,8	318
IH35608060/30	60	–	0,6	87,0	6	1,8	261,0	18	0,9	345
IH35608065/30	65	–	0,6	79,8	5,5	1,7	239,3	16,5	1,0	370
IH35608070/30	70	–	0,5	65,3	4,5	1,4	195,8	13,5	1,2	400
IH35608075/30	75	–	0,5	65,3	4,5	1,4	195,8	13,5	1,3	425
IH35608080/30	80	–	0,4	58,0	4	1,2	174,0	12	1,6	453
IH35608090/30	90	–	0,4	50,8	3,5	1,1	152,3	10,5	1,9	510
IH35608102/30	102	–	0,4	50,8	3,5	1,1	152,3	10,5	2,3	573
IH35608120/30	120	–	0,3	43,5	3	0,9	130,5	9	2,8	663
IH35608152/20	152	–	0,2	29,0	2	0,6	87,0	6	4,4	835

MEDIREX PU

Hose Construction

Flexible hose having a white rigid spiral embedded in a metallized green colour flexible hose. PU body with 1,5 mm wall thickness.



Applications

Excellent resistance to pressure and vacuum.
 Superior resistance to internal abrasion.
 Resistant to atmospheric conditions and chemicals.
 Suction and ducting hose especially for sand, gravel, cement, slurry, etc.
 Specially suitable for abrasive media.

Temperature Range

-25 °C (-13 °F) to +60 °C (+140 °F)

Suction

0,80 bar (600 mm Hg)

Tolerances

On inside/outside diameter: ± 4 %







Length tolerance: ± 1 %

All other technical data are subject to a: ± 5 % tolerance.

Note

Available on request:


MEDIREX PU/ANC with an embedded copper wire to assure electrical continuity.

IHXXXXXXXXXX Part Number/ Standard Length m	 I.D. mm	 Wall Thickness mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH35583038/50	38	–	0,7	101,5	7	2,1	304,5	21	0,7	212
IH35583050/50	50	–	0,7	101,5	7	2,1	304,5	21	1,1	267
IH35583063/50	63	–	0,6	87,0	6	1,8	261,0	18	1,4	330
IH35583075/50	75	–	0,5	72,5	5	1,5	217,5	15	1,8	390
IH35583100/30	100	–	0,3	43,5	3	0,9	130,5	9	3,0	510
IH35583150/20	150	–	0,2	29,0	2	0,6	87,0	6	5,0	745



**FORTIREX PU/ANC****Hose Construction**

Flexible hose having a white rigid spiral embedded in a metallized green colour flexible hose. With an embedded copper wire to assure electrical continuity. PU body with 1,5 mm wall thickness.

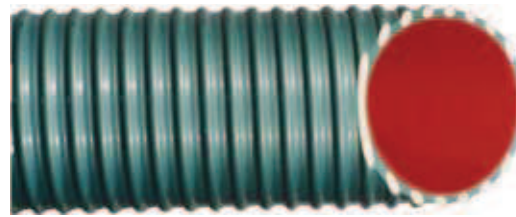**Applications**

Excellent resistance to pressure and vacuum.
Superior resistance to internal abrasion.
Resistant to atmospheric conditions and chemicals.
Suction and ducting hose especially for sand, gravel, cement, slurry, etc.
Specially suitable for abrasive media.

Suction

0,90 bar (675 mm Hg)

Tolerances







On inside/outside diameter: $\pm 4 \%$

Length tolerance: $\pm 1 \%$

All other technical data are subject to a: $\pm 5 \%$ tolerance.

Temperature Range

-25 °C (-13 °F) to +60 °C (+140 °F)

IHXXXXXXXXXX Part Number/ Standard Length m	 I.D. mm	 Wall Thickness mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH35527038/50	38	–	0,9	130,5	9	2,7	391,5	27	0,8	336
IH35527040/50	40	–	0,9	130,5	9	2,7	391,5	27	0,9	350
IH35527050/50	50	–	0,8	116,0	8	2,4	348,0	24	1,2	427
IH35527060/50	60	–	0,8	108,8	7,5	2,3	326,3	22,5	1,6	501
IH35527070/50	70	–	0,7	101,5	7	2,1	304,5	21	1,9	585
IH35527075/50	75	–	0,7	94,3	6,5	2,0	282,8	19,5	2,0	620
IH35527080/50	80	–	0,7	94,3	6,5	2,0	282,8	19,5	2,2	752
IH35527090/50	90	–	0,6	79,8	5,5	1,7	239,3	16,5	2,6	840
IH35527100/30	100	–	0,5	72,5	5	1,5	217,5	15	3,1	928
IH35527120/30	120	–	0,4	58,0	4	1,2	174,0	12	4,0	1102
IH35527152/20	152	–	0,3	43,5	3	0,9	130,5	9	6,3	1368

FORTIREX PU/ANC I.D. mm Parker ITR

APERSPIR PU

Hose Construction

Multilayer PU-PVC hose with a steel wire reinforcement spiral. Inside wall PU, outside layer soft PVC.

Perfect adhesion between layers.

Standard colour: clear – transparent.

Foods and beverages – the polyurethane used is in conformity with:

- FDA-CRF 21 parts 175,105, 177, 1680, 177, 2600
- CEE 82/711, 85/572, 89/109, 90/128, 92/30, 93/8, 95/3, 98/11
- German BGA for foodstuff application



Suction

0,95 bar (713 mm Hg)

Tolerances

On inside/outside diameter: ± 4 %

Length tolerance: ± 1 %

All other technical data are subject to a: ± 5% tolerance.

Applications







Very heavy tasks and applications: industry, construction, agriculture.

Particularly suitable for food at high speed as well as for very abrasive media, such as cement, sand, gravel, grains, metal shavings, etc.

Temperature Range

-20 °C (-4 °F) to +80 °C (+176 °F)

for short peaks +90/100 °C (+194/212 °F)

IHXXXXXXXXXX Part Number/ Standard Length m	 I.D. mm	 Wall Thickness mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH35644030/20	30	–	0,6	90,0	6	1,8	270,0	18	0,63	120
IH35644038/20	38	–	0,6	90,0	6	1,8	270,0	18	0,80	152
IH35644040/20	40	–	0,6	90,0	6	1,8	270,0	18	0,95	160
IH35644045/20	45	–	0,6	90,0	6	1,8	270,0	18	1,15	180
IH35644050/20	50	–	0,6	90,0	6	1,8	270,0	18	1,30	200
IH35644051/20	51	–	0,6	90,0	6	1,8	270,0	18	1,30	204
IH35644060/20	60	–	0,5	72,5	5	1,5	217,5	15	1,75	240
IH35644070/20	70	–	0,5	72,5	5	1,5	217,5	15	2,10	280
IH35644076/20	76	–	0,4	58,0	4	1,2	174,0	12	2,30	304
IH35644102/20	102	–	0,3	43,5	3	0,9	130,5	9	3,75	408



APERSPIR PU I.D. mm Parker ITR

**CERGOM**


Parker ITR International Patent
PCT-EP2007-057488

Hose Construction

Tube: ceramic hexagonal plates (sinterized Alumina) processed to match black BR/NR rubber compound, highly resistant to abrasion. Good resistance to some chemical products: please contact our technical assistance for guidelines about these applications. The plates are made from Alumina Oxide and produced sinterizing atomized dust according to the most advanced technology. A peculiar dense structure and a very high hardness are assured by a special manufacturing process. These features place this hose on top of quality for wear resistance as ever before. The special surface guarantees a perfect flow of the medium avoiding problems due to packing and oxidation.

Reinforcement: synthetic textile fabrics, embedded steel wire helix and built-in copper wires to provide electrical continuity between both ends.

Cover: black, antistatic ($R < 2,0 \text{ M}\Omega/\text{m}$), abrasion and weather-resistant, SBR/NBR rubber compound.

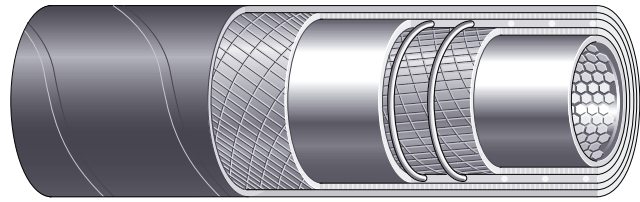

Supplied in customized lengths assembled with standard flanges DIN PN 10/16 and, on request, with special fittings, the working pressure is of 3-6 bar according to assembly method.

Temperature Range

-30 °C (-22 °F) to +70 °C (+158 °F)

Standard lengths**Customized lengths**

≤ I.D. 63,5 mm:	up to 20 m
I.D. 70 - 150 mm:	up to max 15 m
≥ I.D. 200 mm:	up to max 10 m

Tolerances

Length tolerance: ± 1 %

Applications

Suitable for pneumatic suction and delivery of dry cement, coal, CDR (fuel by-waste material), minerals, ceramic powder, glass recovery, fibreglass, and to load tankers and storage bins or silos.

Applications in the industries: steelworks, cookery, thermoelectric power plant, cement works, mining industries, ceramic works, glassworks, insulating material manufactures etc.

IHXXXXXXXXXX Part Number / Standard Length m	 I.D. mm	 O.D. mm	 Max. Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH36829020/0	25	49	0,6	90,0	6	1,8	261,0	18	2,59	375
IH36829021/0	32	56	0,6	90,0	6	1,8	261,0	18	3,07	480
IH36829022/0	38	62	0,6	90,0	6	1,8	261,0	18	3,48	570
IH36829023/0	42	66	0,6	90,0	6	1,8	261,0	18	3,75	630
IH36829024/0	48	72	0,6	90,0	6	1,8	261,0	18	4,17	720
IH36829025/0	50	74	0,6	90,0	6	1,8	261,0	18	4,31	750
IH36829026/0	60	86	0,6	90,0	6	1,8	261,0	18	5,27	900
IH36829027/0	63,5	90	0,6	90,0	6	1,8	261,0	18	5,54	953
IH36829028/0	70	100	0,6	90,0	6	1,8	261,0	18	6,00	1050
IH36829029/0	75	105	0,6	90,0	6	1,8	261,0	18	6,35	1125
IH36829030/0	80	110	0,6	90,0	6	1,8	261,0	18	6,93	1200
IH36829031/0	100	132	0,6	90,0	6	1,8	261,0	18	8,56	1500
IH36829032/0	114	147	0,6	90,0	6	1,8	261,0	18	13,24	1710
IH36829033/0	125	158	0,6	90,0	6	1,8	261,0	18	14,42	1875
IH36829034/0	150	188	0,6	90,0	6	1,8	261,0	18	19,42	2250
IH36829035/0	200	240	0,6	90,0	6	1,8	261,0	18	27,68	3045

RUBBER HOSE CERGOM MADE IN ITALY Parker ITR